

BATTERY LITHIUM- IRON-PHOSPHATE

9Ah MAXX

12V : 9Ah
Voltage : Capacity




MAXX


TECHNICAL DATA

INDEX	B0068
MODEL	200Ah MAXX
Nominal voltage [V]	12,8
Nominal capacity [Ah]	200
Standard terminal	M8
Length [mm]	357
Width [mm]	304
Total width [mm]	335
Height [mm]	152
Weight [kg]	22
Recommended charging current [A]	40
Maximum charging current [A]	100
Peak cut-off current [A]	600
Self-discharge within one month	<3%
Housing protection	IP65
Internal resistance [mΩ]	20


DISCHARGE CHARACTERISTICS AT 25°C

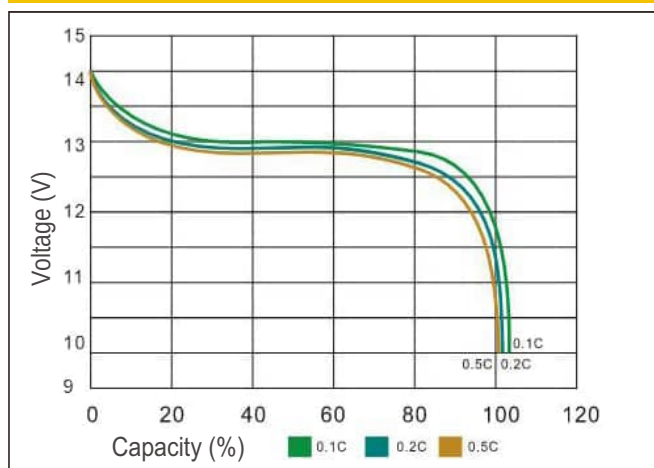


EFFECT OF TEMPERATURE ON CAPACITY

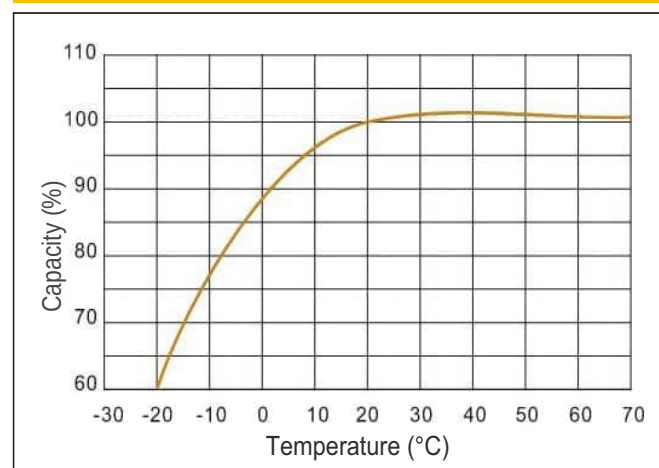



CHARGE STATE CURVES

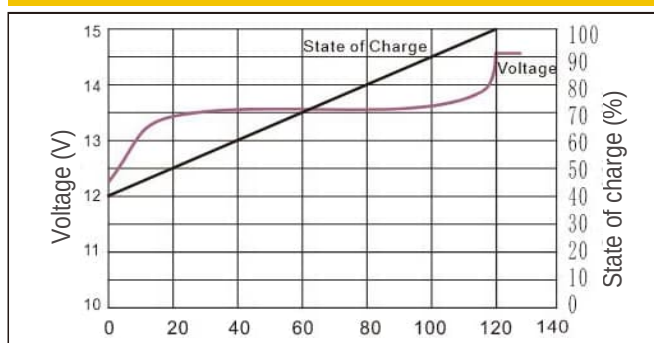

CYCLE LIFE WITH DOD AT 25°C

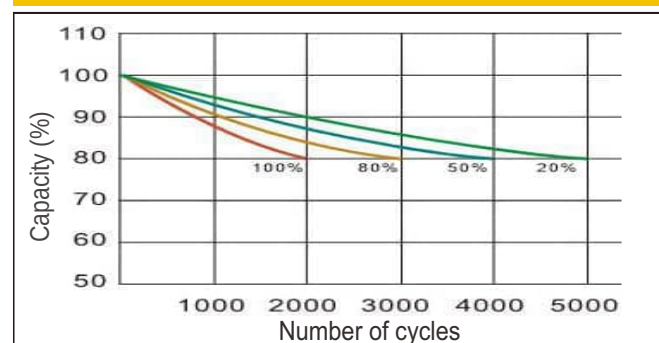

TECHNICAL DRAWINGS

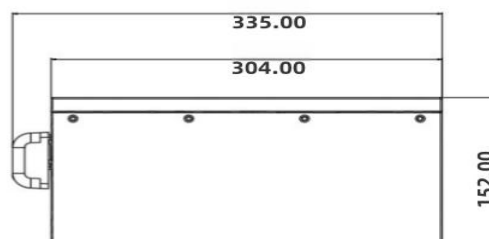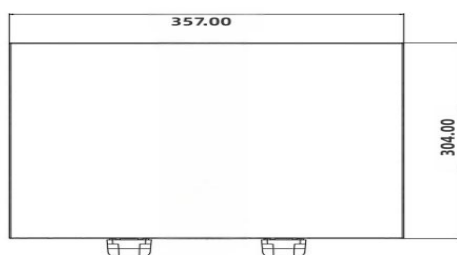

The electrical parameters indicated on the product label may differ slightly from the specifications.

4sun®

4Sun sp. z o.o. sp.k.

Annopol 4, 03-236 Warszawa

tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu